

# 410 Airug<sup>®</sup>

Construction of microcellular vinyl with ribbed pattern



# Ergonomic, Anti-fatigue & Safety Matting - Dry Areas Linear Lengths 410 Airug®

Basic worker comfort derived from 9.4 mm thick worker platform comprised of a construction of microcellular vinyl consisting of millions of air bubbles.

- Ribbed pattern enhances traction
- All four sides are bevelled and sealed to minimize tripping hazards
- Slip resistance R10 according to DIN51130 and BG-rule BGR181

## Recommended use



- Dry Areas
- For placement in manufacturing plants, assembly lines, picking, packing and logistics warehouses, individual work stations.
- Light duty

## Colors:

- Black
- Black/Yellow
- Grey

## Sizes:

- 60cm x 91cm
- 90cm x 150cm
- 122cm x 1inm
- 60cm x 1inm
- 91cm x 1inm
- 122cm x 18.3m
- 60cm x 18.3m
- 91cm x 18.3m

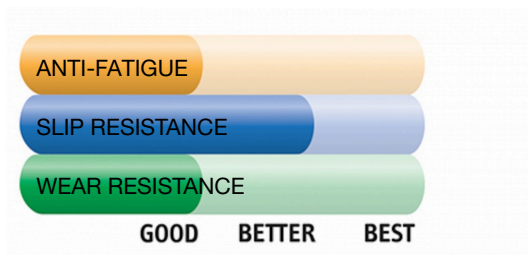

# Ergonomic, Anti-fatigue & Safety Matting - Dry Areas Linear Lengths Airug®

## General

Brand	Notrax®
Category	Dry Areas Linear Lengths
Product Number	410
Product Family	Industrial & Commercial Matting
Product Group	Ergonomic, Anti-fatigue & Safety Matting
Product Name	Airug®
Recommended use	For placement in manufacturing plants, assembly lines, picking, packing and logistics warehouses, individual work stations.
Shipping Location	Barendrecht 2992SB, The Netherlands, Moselle, MS 39459
Type	Dry Areas - Comfort™
Usage Intensity	Light duty

## Sustainability

Reach	Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).
Sustainability	Recyclable material
Warranty	1

## Tests

Abrasion Resistance 1000	22.0%
Abrasion Resistance 500	12.6%
Compression Deflection 1.4	0.58 cm
Compression Deflection 2.8	0.63 cm
Elongation	160.6%
Fire rating EU	Class 2 according NFPS Safety Code 101
Fire rating US	Pass
Hardness	20 Shore A
Slip Rating	R10
Coefficient Friction Dry	0.78
Surface Flammability	Pass
Tear Strength	6.5 lb

# Technical Specifications

Application	Industrial
Breaking Load	29.1 lb
Edges	Bevelled edges on all sides
Material	Microcellular vinyl
Material Group	Vinyl
Process	Foaming

## Airug® Black

Art. nr.	Dimension (cm)	Weight (kg)	Thickness (mm)
410C0324BL	60cm x linm	1.4	9.4
410R0336BL	91cm x 18.3m	38	9.4
410R0348BL	122cm x 18.3m	51	9.4
410R0324BL	60cm x 18.3m	26	9.4
410S0335BL	90cm x 150cm	3.2	9.4
410C0348BL	122cm x linm	2.8	9.4
410C0336BL	91cm x linm	2.1	9.4
410S0323BL	60cm x 91cm	1.3	9.4

## Airug® Black/Yellow

Art. nr.	Dimension (cm)	Weight (kg)	Thickness (mm)
410C0324BY	60cm x linm	1.4	9.4
410R0348BY	122cm x 18.3m	51	9.4
410R0336BY	91cm x 18.3m	38	9.4
410R0324BY	60cm x 18.3m	26	9.4
410S0335BY	90cm x 150cm	3.2	9.4
410C0348BY	122cm x linm	2.8	9.4
410C0336BY	91cm x linm	2.1	9.4
410S0323BY	60cm x 91cm	1.3	9.4

## Airug® Grey

Art. nr.	Dimension (cm)	Weight (kg)	Thickness (mm)
410R0348GY	122cm x 18.3m	51	9.4
410C0324GY	60cm x linm	1.4	9.4
410R0336GY	91cm x 18.3m	38	9.4
410R0324GY	60cm x 18.3m	26	9.4
410C0336GY	91cm x linm	2.1	9.4
410S0335GY	90cm x 150cm	3.2	9.4
410S0323GY	60cm x 91cm	1.3	9.4
410C0348GY	122cm x linm	2.8	9.4