

Integra 11 heel safe entrance mat provides remarkable dirt and moisture removal and elegant appearance together with its interlocking tiles and high performance carpet inserts. Integra 11 mm is ideal in areas where visual attractiveness is expected.

Heavy duty entrance mat is specially designed for entranceways with high density foot traffic, such as airports, subway stations, shops, shopping centres, hotels, offices, hospitals and schools. Integra 11 mm is performing best when used indoors or in weather protected areas.

High heel safe construction and open grid design allows fluid and small debris to pass through the openings keeping the surface dry and clean. The tile's textile surface scrapes shoes clean and provides a safe, slip resistant walking surface.


An open, heel proof construction provides plenty of storage capacity for wet and dry soil. Removed dirt particles and moisture can fall through the openings keeping surface dry and clean.

Specifications		
Material	UV-resistant vinyl/NBR 100 % recyclable	
Tile size	30,5 x 18,3 cm	
Packaging	18 tiles / package (= 1 m²)	
Height	11 mm	
Weight	7.8 kg/m²	
Tile colour	Black, dark grey	
Insert pile material	100 % polyamide	
Insert colours	Black, grey	
Temperature resistance	-35 °C - +70 °C	

Accessories

Alu edging 9/12 mm, 300 cm

Anchors 12 mm

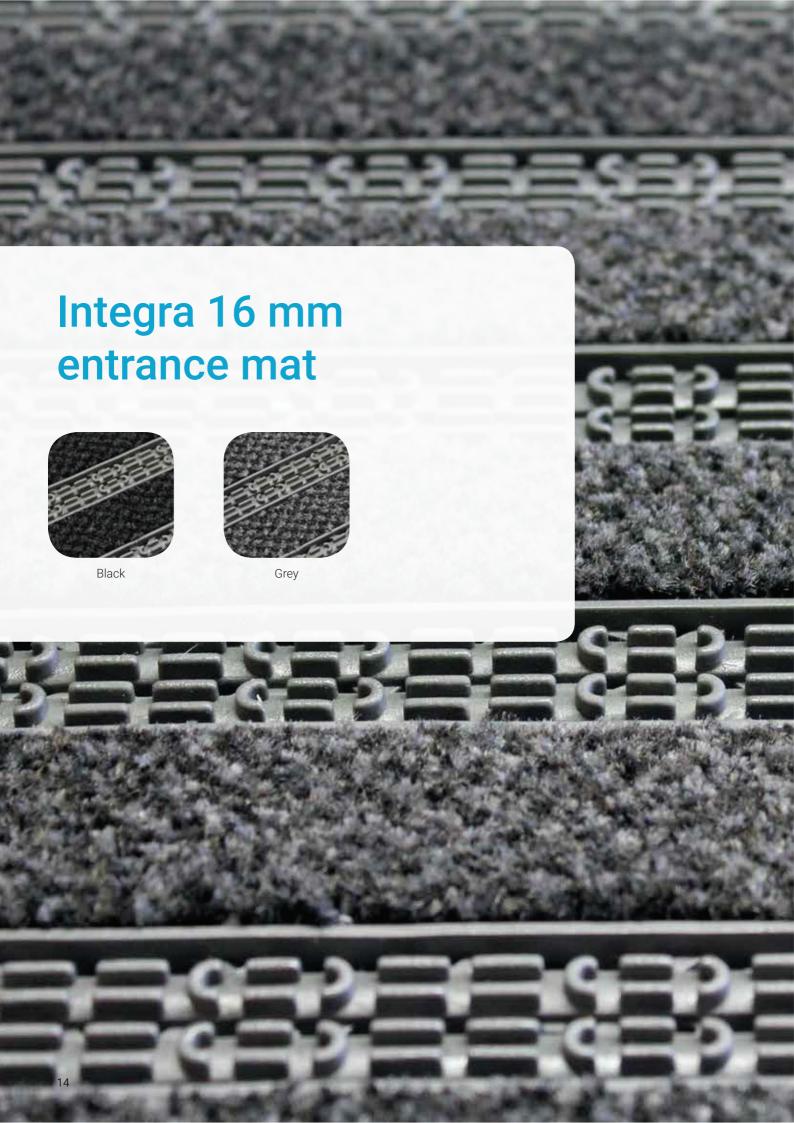



Integra 16 mm heel proof entrance mat combines performance and elegance together with its unique interlocking tiles and high performance carpet inserts. Integra 16 mm is suitable for most demanding applications such as shopping centres, airports, subway stations and hotels.

Tiles have open grid yet heel proof construction.

Distinctive of Integra tile is the combination of lamellas and carpet inserts creating alternating zones for scraping, cleaning and absorbing. Lamellas form the scraping and cleaning part of the tile and carpet inserts absorbing part of the tile.

Lamellas of tile remove grit and strong hard fibres of carpet insert remove dust and fine fibres absorb moisture. The steady rhythm of lamellas and plain carpet areas yields a unique design effect of Integra.

Integra 16 mm heel proof interlocking tile is fully compatible with the Combo 16 mm plain tile.

	• •		
S D	\sim C $_{ m I}$ T $_{ m I}$	$\alpha \gamma T$	ons
			\mathbf{u}_{1}
			• • • •

Material **UV-resistant vinyl** 100 % recyclable Tile size 40 x 14 cm Packaging 20 tiles / package (= 1.07 m²) Height 16 mm Weight 11 kg/m² Tile colour Black, dark grey Insert pile material 100% polyamide Insert colours Black, grey Temperature resistance -20 °C - +70 °C Rolling load KfB dynamic test: 300 kg per wheel Fire classification EN 13501: Bfl - s1 Slip resistance DIN 51130: R11 **Emissions** ISO 16000-9: TVOC class A+

Accessories

Alu edging 16/20 mm, 300 cm

Anchors 16 mm